

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

AT

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>C01B 31/00, G01B 7/34</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/09443</b> (43) International Publication Date: 24 February 2000 (24.02.00)
(21) International Application Number: <b>PCT/US99/15222</b> (22) International Filing Date: <b>2 July 1999 (02.07.99)</b> (30) Priority Data: 09/133,948                      14 August 1998 (14.08.98)                      US (71) Applicant: <b>THE BOARD OF TRUSTEES OF THE LELAND STANFORD JUNIOR UNIVERSITY (US/US); Suite 350, 900 Welch Road, Palo Alto, CA 94304-1850 (US).</b> (72) Inventors: <b>DAI, Hongjie; 365 Pescadero, Sunnyvale, CA 94086 (US). QUATE, Calvin, F.; 859 Cedro Way, Stanford, CA 94305 (US). SOH, Hyongsok; 101E Escondido Village, Stanford, CA 94305 (US). KONG, Jing; 51C Escondido Village, Stanford, CA 94305 (US).</b> (74) Agent: <b>ALBOSZTA, Marek; 426 Lowell Avenue, Palo Alto, CA 94301 (US).</b>	(81) Designated States: <b>CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  Published <i>With international search report.</i>	
(54) Title: <b>CARBON NANOTUBE STRUCTURES MADE USING CATALYST ISLANDS</b>  <div data-bbox="370 1144 1250 1564"> </div>		
(57) Abstract  <p>The present invention includes several nanotubes (30) which can be made using catalyst islands (45) disposed on a substrate (42) (e.g. silicon, alumina, or quartz) or on the free end (48) of an atomic force microscope cantilever (42). The catalyst islands (45) are capable of catalyzing the growth of carbon nanotubes (30) from carbon containing gases (e.g. methane). The present invention includes an island (45) of catalyst material (such as Fe O) disposed on the substrate (42) with a carbon nanotube (30) extending from the island (45). Also included in the present invention is a pair of islands (29) with a nanotube (30a) extending between the islands (29), electrically connecting them. Conductive metal lines (34) connected to the islands (29) (which may be a few microns on a side) allows for external circuitry to connect to the nanotube (30a). Such a structure can be used in many different electronic and microelectromechanical devices. Also, the present invention includes a catalyst particle (45) disposed on the free end (48) of an AFM cantilever (42) and having a nanotube (30) extending from the particle (45). The nanotube (30) can be used as the scanning tip of the AFM as is known in the art.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5

**Carbon Nanotube Structures made Using Catalyst Islands**

10

**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority from US patent application serial  
15 number 09/133,948 filed 14 August 1998.

**FIELD OF THE INVENTION**

The present invention relates generally to the fabrication of  
nanotubes, and in particular to methods of fabricating nanotube  
20 structures from an array of catalyst islands on a semiconductor  
surface.

**BACKGROUND OF THE INVENTION**

Carbon nanotubes are recently discovered, hollow graphite tubules.  
25 When isolated, individual nanotubes are useful for making  
microscopic electrical, mechanical, or electromechanical devices.  
Obtaining individual, high quality, single-walled nanotubes has  
proven to be a difficult task, however. Existing methods for the  
production of nanotubes, including arc-discharge and laser  
30 ablation techniques, yield bulk materials with tangled nanotubes.  
The nanotubes in the bulk materials are mostly in bundled forms.  
These tangled nanotubes are extremely difficult to purify,  
isolate, manipulate, and use as discrete elements for making  
functional devices.

35

One conventional method for producing carbon nanotubes is  
disclosed in U.S. Patent 5,482,601 issued to Oshima et al. on  
January 9, 1996. The nanotubes are produced by successively  
repositioning a rod-like, carbon anode relative to a cathode  
40 surface such that a tip of the anode successively faces different  
portions of the cathode surface. A direct current voltage is  
impressed between the tip of the anode and the cathode surface so  
that an arc discharge occurs with the simultaneous formation of  
carbonaceous deposits containing carbon nanotubes on the cathode  
45 surface. The carbonaceous deposits are scraped and collected.

5 U.S. Patent 5,500,200 issued to Mandeville et al. on March 19,  
1996 discloses a method for the bulk production of multi-walled  
tubes. According to the method, a catalyst is prepared using  
particles of fumed alumina with an average particle size of about  
100 Å. Iron acetylacetonate is deposited on the alumina  
10 particles, and the resultant catalyst particles are heated in a  
hydrogen/ethylene atmosphere. The catalyst particles are  
preferably reacted with the hydrogen/ethylene mixture for about  
0.5 hours in a reactor tube, after which the reactor tube is  
allowed to cool to room temperature under a flow of argon.  
15 Harvesting of the carbon tubes so produced showed a yield greater  
than 30 times the weight of the iron in the catalyst particles.

Although the methods described by Oshima and Mandeville are  
effective for producing bulk amounts of carbon tubes or carbon  
20 fibrils, the resulting bulk materials are "hairballs" containing  
tangled and kinked tubes which one collects into vials or  
containers. These bulk materials are useful to put into polymers  
or metals to make composites that exhibit improved properties of  
the polymers or metals. For making functional microscopic  
25 devices, however, these bulk materials are nearly useless because  
it is nearly impossible to isolate one individual tube from the  
tangled material, manipulate the tube, and construct a functional  
device using that one tube. Also, many of the tubes have  
molecular-level structural defects which results in weaker tubes  
30 with poor electrical characteristics.

Atomic force microscopes (AFMs) sometimes employ nanotubes as the  
scanning tip because nanotubes are resilient and have an  
atomically sharp tip. However, the manufacturing of nanotube-  
35 tipped AFM devices is problematic because the nanotubes must be  
painstakingly separated from disorganized bundles of nanotubes and  
attached to the AFM cantilever. It would be an advance in the art  
of atomic force microscopy to provide a nanotube-tipped AFM device  
that is simpler to manufacture.

40

5                   **OBJECTS AND ADVANTAGES OF THE INVENTION**

10       In view of the above, it is an object of the present invention to provide a method for the large scale synthesis of individual distinct single-walled nanotubes. In particular, it is an object of the present invention to provide such a method which allows  
15       nanotube growth to be confined to desired locations so that the nanotubes can be easily addressed and integrated into structures to obtain functional microscopic devices. It is a further object of the invention to provide a method for integrating the nanotubes into semiconductor microstructures to obtain a variety of nanotube  
20       devices. Further, it is an object of the present invention to provide a nanotube-tipped atomic force microscope device which is simple to manufacture.

      These and other objects and advantages will become more apparent  
25       after consideration of the ensuing description and the accompanying drawings.

**SUMMARY**

      These objects and advantages are provided by an apparatus  
25       including a substrate and a catalyst island disposed on the substrate. The catalyst island includes a catalyst particle that is capable of growing carbon nanotubes when exposed to a hydrocarbon gas at elevated temperatures. A carbon nanotube extends from the catalyst particle. The nanotube may be in  
30       contact with a top surface of the substrate.

      The substrate may be made of silicon, alumina, quartz, silicon oxide or silicon nitride. The nanotube may be a single-walled nanotube. The catalyst may include  $\text{Fe}_2\text{O}_3$  or other catalyst  
35       materials including molybdenum, cobalt, nickel, or zinc and oxides thereof (iron, molybdenum and ruthenium oxides are preferred). The catalyst island is preferably about 1-5 microns in size.

40       The present invention also includes an apparatus having a substrate with two catalyst islands and a nanotube extending between the islands. The nanotube provides an electrical connection between the islands, which are electrically conductive. Conductive lines can provide electrical connections to the islands

5 and nanotube. The nanotube may be freestanding above the substrate. A freestanding nanotube can be used as a high frequency, high-Q resonator.

Alternatively, one of the islands is replaced with a metal pad  
10 that does not have catalytic properties.

The present invention also includes an atomic force microscopy apparatus that has a catalyst particle disposed on a free end of a cantilever. A nanotube extends from the catalyst particle. The  
15 nanotube can be used as the scanning tip of the atomic force microscope apparatus.

The present invention also includes a method of making individually distinct nanotubes on a substrate surface. The  
20 method begins with disposing catalyst islands on the surface of a substrate. Then, the catalyst islands are contacted with methane gas at elevated temperature. The nanotubes grown are separate and extend over the surface of the substrate. The separate and distinct nanotubes can be incorporated into microelectronic or  
25 microelectromechanical devices.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a first step in making nanotubes according to the  
30 present invention.

Fig. 2 shows a second step in making nanotubes according to the present invention.

Fig. 3 shows a third step in making nanotubes according to the present invention.

35 Fig. 4 shows a top view of a substrate with three catalyst islands.

Fig. 5 shows a closeup top view of a single catalyst island which has been used to grow nanotubes.

Fig. 6 shows an apparatus according to the present invention which  
40 has a nanotube connected between a catalyst island and a metal pad.

Fig. 7 shows a preferred embodiment of the present invention in which metal covers are disposed on top of the catalyst islands and portions of the nanotubes.

- 5 Fig. 8A-8C illustrate how the metal covers of Fig. 7 can be made.  
Fig. 9 shows a side view of a resonator according to the present  
invention made from a freestanding nanotube supported by the  
ends of the nanotube.  
Fig. 10 shows a top view illustrating how the apparatus of Fig. 9  
10 can be made.  
Figs. 11A and 11B illustrate an alternative method of making the  
apparatus of Fig. 9.  
Fig. 12 shows an atomic force microscope tip made according to the  
present invention.  
15 Figs. 13A-13D illustrate a method of producing a carbon nanotube  
on a tip of an atomic force microscope cantilever according to  
the present invention.

#### DETAILED DESCRIPTION

20 Fig. 1 shows a first step in a method of the present invention for  
making individual carbon nanotubes which are individually  
separable and distinct. A layer of resist 20 is disposed and  
patterned on a top surface of a substrate 22. Patterning can be  
25 performed by e-beam lithography. The substrate 22 can be made of  
silicon, alumina, quartz, silicon oxide or silicon nitride for  
example. The substrate can also have a metal film on top.

The patterned resist 20 has holes 24 which expose the underlying  
30 substrate 22. The holes 24 are about 3-5 microns in size and  
spaced apart by a distance 26 of about 10 microns. The resist may  
have a single hole or many holes 24.

Next, in Fig. 2, a solution of  $\text{Fe}(\text{NO}_3)_3$  in methanol, mixed with  
35 alumina nanoparticles (about 15-30 nanometers in size, for  
example) is deposited on the surfaces of the resist 20 and  
substrate 22. In a specific example, catalyst preparation  
includes mixing 4.0 grams of alumina nanoparticles with 1.0 gram  
of  $\text{Fe}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$  in 30mL methanol for 24 hours. After applying the  
40 mixture to the substrate, the solvent (i.e. methanol) is  
evaporated, leaving alumina nanoparticles coated with metal salt  
(i.e.  $\text{Fe}(\text{NO}_3)_3$ ) 28 adhering to the resist and in the holes 24.  
Next, in Fig. 3, a lift-off process is performed, leaving isolated  
(nonconnected) islands 29 of  $\text{Fe}(\text{NO}_3)_3$ -coated nanoparticles

5 adhering in regions where holes 24 existed. Fig. 4 shows a top view of the islands 29.

Heating the substrate 22 and nanoparticles decomposes the  $\text{Fe}(\text{NO}_3)_3$  to  $\text{Fe}_2\text{O}_3$ . This is performed by placing the substrate in a furnace  
10 with an Argon atmosphere and heating to about 100-400° Celsius. The  $\text{Fe}_2\text{O}_3$ /nanoparticle mixture is an active catalyst which will catalyze the formation of carbon nanotubes when exposed to methane gas at elevated temperature.

15 Growth of single-walled nanotubes is performed by heating the substrate with catalyst islands in the furnace at about 850-1000°C and flowing 99.99% pure methane over the catalyst islands 29 at a velocity of about 2-20 centimeters per second (e.g., for a 1-inch diameter tube, flowing methane at a rate of about 600-6000 $\text{cm}^3/\text{min}$ ).  
20 Use of these parameters results in nanotubes which are substantially perfect and straight, with no structural flaws (i.e. all the carbon rings in the nanotubes have 6 carbon atoms instead of 5 or 7 carbon atoms). Most of the nanotubes are single-walled, with diameters in the range of about 1-5 nanometers. When grown  
25 at 1000°C, 90% of the tubes were single-walled; when grown at 900°C, 99% of the tubes were single-walled. Most of the nanotubes have diameters in the range of 1-2 nanometers. The nanotubes have large aspect ratios (length/diameter) approaching about 10,000, and are very straight (a result of the absence of  
30 structural flaws).

It is noted that many different recipes for nanotube catalysts are known in the art. For example,  $\text{Fe}(\text{SO}_4)$  or other Iron salts can be substituted for the  $\text{Fe}(\text{NO}_3)_3$ . The quality of the nanotubes depends  
35 upon the catalyst material used. Iron, molybdenum and zinc oxides are preferred for making high quality tubes. A particularly good catalyst is made with a mixture of iron, molybdenum and ruthenium oxides. Most generally, both elemental metals and their oxides can be used to grow nanotubes.

40

Also, the nanoparticles can be made of many ceramic materials besides alumina. Silica, for example, can also be used. Generally, refractory oxide ceramic materials can be used in place of the alumina nanoparticles. Still further, nanoparticles may



- 5 not be used at all. Small quantities of Iron salts can be deposited on the substrate (for example, by dissolving in a solvent and evaporating the solvent) and heated to decomposition without being mixed with nanoparticles.
- 10 **Fig. 5** shows a closeup top view of the island 29 and substrate after the growth of nanotubes has been performed. Carbon nanotubes 30 extend from the island 29 in random directions. The carbon nanotubes 30 are not freestanding, but are disposed in contact with the substrate surface. Also, the carbon nanotubes
- 15 are firmly attached to the island 29. The nanotubes generally grow in a 'base-growth' mode, where new carbon is added to the nanotubes 30 at the point where they are attached to the island 29. The nanotubes are attached at one end to the island, and the opposite end is free. The nanotubes can be used as resonators by
- 20 allowing the free end to vibrate.

The carbon nanotubes 30 are not tangled together, but are individually separable. This is due to the fact that a small number of nanotubes grow from each island. Also, the nanotubes

25 are spaced apart by a substantial distance. Typically, about 10-50 nanotubes are grown from each island. If larger numbers of nanotubes are grown (e.g. by using a more effective catalyst), then the nanotubes may form bundles. This is undesirable for applications requiring single distinct nanotubes. However,

30 bundles of nanotubes can also be useful for many electrical and mechanical devices such as interconnects, field effect transistors, single electron transistors, and resonators which have only one fixed end.

- 35 Individually separable nanotubes are useful for the manufacturing of electronic and micromechanical devices because individual nanotubes can be incorporated into the devices by appropriately locating islands 29. Electrical and mechanical connections can be made to individual nanotubes if they are spatially separated and
- 40 distinct.

**Fig. 6** shows a top view of an electronic device made by locating the island 29 close to a patterned metal pad 32. A single nanotube 30a extends from the island 29 to the metal pad 32,

- 5 thereby providing electrical contact between the island 29 and pad 32. The island 29 and pad 32 are spaced apart by a distance in the range of 100 nanometers to about 5 microns. The island 29 and pad 32 are both electrically conductive, so patterned conductive lines 33 on the substrate surface can provide for macroscopic
- 10 electrical connections to the nanotube 30a. The nanotube 30a with a macroscopic electrical connection on each end can be used in many devices including field-effect transistors, single electron transistors, or low current value fuses.
- 15 The conductive lines 33 may be applied to the substrate 20 before the islands 29 are deposited. In this way, the islands rest on top of the conductive lines 33. Also, the conductive lines 33 can be disposed on top of the islands (by applying the conductive lines on top of the islands. The conductive lines can be
- 20 deposited before or after the growth of nanotubes.

The apparatus of Fig. 6 is made by simply locating the island and metal pad proximate to one another and catalytically growing nanotubes from the island. The closer the island 29 and pad 32,

25 the more likely that a nanotube will be grown that connects the island and pad.

Also, two or more nanotubes can simultaneously electrically connect the island 29 and metal pad 32. If multiple nanotubes

30 connect between the island and pad, then all but one of the nanotubes can be broken with an AFM tip. This is performed by dragging the AFM tip across the substrate surface so that it bends unwanted nanotubes until they break.

35 Further, a second catalyst island can be substituted for the metal pad 32. In such a device, the nanotube 30a provides electrical contact between two catalyst islands 29 instead of between an island 29 and a metal pad 32. Metal lines 33 can provide electrical connections to each catalyst island as in Fig. 6. The

40 same spacing distance can be used (100 nanometers to about 5 microns) if a catalyst island is substituted for the metal pad.

Fig. 7 shows a side view of a preferred embodiment of the present invention in which a metal cover 34 is deposited on top of each

5 catalyst island 29. The metal covers 34 can be made of platinum or titanium-gold alloy, for example. Each metal cover 34 covers a portion of each island 29 and covers an end portion 37 of the nanotube 30a. The metal cover therefore serves to help hold the nanotube 30a rigidly in place.

10

The metal covers 34 help to provide Ohmic electrical connections to the ends of the nanotube 30a. Ohmic electrical connections with the nanotube are assured by heating the apparatus after depositing the metal covers 34. For example, heating the  
15 apparatus to about 300°C in air will result in Ohmic electrical connections between the metal covers 34 and nanotube 30a. Metal lines 33 as shown in Fig. 6 can be connected to the metal covers to provide macroscopic electrical connections with the nanotube 30a. Electrical conduction through the catalyst island is  
20 therefore not necessary.

The metal covers 34 can be made by lithographically patterning the metal comprising the covers 34. Figs. 8A-8C illustrate how this can be done. First, a layer of spin-on resist 60 is deposited on  
25 top of the islands 29 and nanotube 30a. Next, the resist 60 is etched in regions 61 where the metal cover 34 is to be located. The metal comprising the metal covers 34 is then deposited (by physical vapor deposition or CVD processes, for example), and the resist 60 is removed in a lift-off process which leaves only the  
30 metal covers 34.

The present invention can provide freestanding nanotubes capable of acting as high-Q resonators. Fig. 9 shows a side view of a device including a freestanding nanotube 30b. The freestanding  
35 nanotube 30b is suspended above the substrate 22 which is depressed in a trench region 35 between the islands 29. The trench 35 can be formed by etching the substrate. The nanotube 30b therefore lies above a surface 36 of the etched substrate 22 and is supported only by nanotube ends 39. The trench 35 and  
40 metal covers 34 can be combined in the same apparatus.

The nanotube 30b can be resonated by locating the nanotube 30b in a magnetic field (perpendicular to the length of the nanotube 30b) and passing an oscillating current through the nanotube. A

5     conductive film 37 capacitively coupled with the nanotube 30b extracts a resonant signal from the nanotube. Alternatively, the conductive film 37 can be used to electrostatically excite mechanical vibrations in the nanotube 30b.

10    **Fig. 10** shows a top view of the substrate 22 and islands 29 illustrating how the apparatus of **Fig. 9** can be made. First, the nanotube 30b which connects the islands 29 is grown. Other nanotubes will also be grown from both islands, but they are not shown for clarity. Then, all regions of the substrate except for  
15    a region defined by a box 38 are masked with resist. Spin-on resist can be used, for example. The act of spin-coating resist on the substrate will not damage the nanotube 30b. Next, the region inside the box 38 is exposed to an etchant which removes substrate material, but does not affect the nanotube 30b. Many  
20    different etchants can be used, depending upon the composition of the substrate (e.g. hydrofluoric acid can be used to etch SiO<sub>2</sub> or Si substrates). Etching the substrate 22 under the nanotube 30b results in the nanotube being supported only at its ends 39. Metal lines 33 provide macroscopic electrical connections to the  
25    nanotube 30b through the catalyst islands 29. Also, metal covers 34 can be deposited before or after etching the trench 35 to provide Ohmic electrical connections to the nanotube and improved mechanical stability for the nanotube ends 39.

30    An alternative method for making the apparatus of **Fig. 9** is shown in the side views of **Figs. 11A** and **11B**. In **Fig. 11A**, the substrate 22 is etched to form the trench 35 where the nanotube 30b is suspended. Then islands 29 are disposed on opposite sides of the trench 35 and nanotubes are grown from the islands 29. The  
35    nanotube 30b that connects the islands grows from one island to the other. Alternatively, one of the islands can be replaced with the metal pad 32, in which case the nanotube grows from the island 29 to the pad 32. Also, metal covers 34 can be deposited on top of the nanotube 30b and catalyst islands 29.

40

The present invention includes an embodiment where the freestanding nanotube is only supported on one end by a catalyst island 29 (i.e. the freestanding nanotube does not extend all the

5 way across the trench 35). The nanotube is therefore a cantilever, and can be used as a resonator.

It is noted that growing nanotubes between islands, or between an island and a metal pad is an uncertain endeavor. One cannot be  
10 sure that a particular arrangement of catalyst islands will result in a nanotube connection between a particular pair of islands, or how many nanotubes will connect. However, if a pair of islands are spaced less than about 10 microns apart, and are at least 1 micron wide, a nanotube is likely to connect the pair of islands.  
15 At least one bridging nanotube connection can be practically assured if a number of islands are disposed with various spacings in an array.

**Fig. 12** shows another embodiment of the present invention in which a catalyst particle 45 is located on a tip 47 of an atomic  
20 force microscope (AFM) cantilever 42. The cantilever 42 is supported by a base 49, and has a free end 48 opposite the base 49. The particle 45 may be made of  $\text{Fe}_2\text{O}_3$  (decomposed from  $\text{Fe}(\text{NO}_3)_3$ ), for example. The catalyst particle 45 may or may not  
25 have supporting nanoparticles (i.e. silica or alumina particles). The catalyst particle is firmly attached to the tip 47. Nanotubes 30 grown from the particle 45 are firmly attached to the cantilever and are atomically sharp. Nanotubes grown from the catalyst particle can be used as probe tips for AFM.  
30 Alternatively, the cantilever does not have a tip 47, and the particle is disposed directly on the cantilever 42.

**Figs. 13A and 13B** illustrate how the apparatus of **Fig. 12** can be made. First, in **Fig. 13A**, a substrate 50 is coated with a gold  
35 film 52, and then droplets of  $\text{Fe}(\text{NO}_3)_3$  dissolved in methanol are deposited on the gold surface. The methanol is then evaporated leaving only small particles 54 of  $\text{Fe}(\text{NO}_3)_3$  on the gold film 52. Next, as shown in **Fig. 13B**, the AFM tip 47 is brought into contact with a particle 54 of  $\text{Fe}(\text{NO}_3)_3$ . An electric field is then  
40 applied between the tip 47 and the gold film 52. The electric field causes the  $\text{Fe}(\text{NO}_3)_3$  particle to adhere to the tip 47 and may cause the  $\text{Fe}(\text{NO}_3)_3$  to decompose into  $\text{Fe}_2\text{O}_3$ . Then, in **Fig. 13C**, the cantilever 42 and tip 47 with the adhered  $\text{Fe}(\text{NO}_3)_3$  particle 54 is removed from the gold film 52. In **Fig. 13D**, the device is

- 5 heated to fully decompose the  $\text{Fe}(\text{NO}_3)_3$  particle 54 into  $\text{Fe}_2\text{O}_3$ . This transforms the  $\text{Fe}(\text{NO}_3)_3$  particle 54 into a catalyst particle 45 (shown in Fig. 12). Then, nanotubes 30 are grown from the catalyst particle 45.
- 10 An AFM cantilever with a catalytically grown nanotube tip has several advantages over an AFM cantilever with a nanotube bonded with other techniques. It is a relatively simple task to catalytically grow a nanotube from the catalyst particle on the cantilever. Also, the nanotube is firmly bonded to the
- 15 cantilever.

It will be clear to one skilled in the art that the above embodiment may be altered in many ways without departing from the scope of the invention. Accordingly, the scope of the invention

20 should be determined by the following claims and their legal equivalents.

5

## CLAIMS

What is claimed is:

1. An apparatus comprising:
  - 10      a) a substrate with a top surface;
  - b) a catalyst island disposed on the top surface of the substrate;
  - c) a carbon nanotube extending from the catalyst island.
- 15      2. The apparatus of claim 1 wherein the nanotube is disposed on the top surface of the substrate.
3. The apparatus of claim 1 wherein the nanotube is a single-walled nanotube.
- 20      4. The apparatus of claim 1 wherein the catalyst island comprises  $\text{Fe}_2\text{O}_3$ .
5. The apparatus of claim 1 wherein the catalyst island  
25      comprises a material selected from the group consisting of iron, molybdenum, cobalt, nickel, ruthenium, zinc and oxides thereof.
6. The apparatus of claim 1 wherein the catalyst island is in  
30      the range of 1-5 microns in size.
7. The apparatus of claim 1, wherein the substrate comprises a material selected from the group consisting of silicon, alumina, quartz, and silicon nitride.
- 35      8. The apparatus of claim 1 wherein the catalyst island comprises particles of ceramic material.
9. The apparatus of claim 1 further comprising a metal cover  
40      which covers an end portion of the nanotube and a portion of the island.
10. An apparatus comprising:

- 5       a) a substrate with a top surface;  
      b) two catalyst islands disposed on the top surface of the  
          substrate;  
      c) a carbon nanotube extending between the catalyst islands  
          such that the nanotube provides an electrical connection  
10       between the catalyst islands.
11. The apparatus of claim 10 wherein the nanotube is disposed  
      on the top surface of the substrate.
- 15       12. The apparatus of claim 10 wherein the nanotube is supported  
          only by its ends.
13. The apparatus of claim 10 wherein the substrate comprises a  
      trench under the nanotube so that the nanotube is  
20       freestanding.
14. The apparatus of claim 10 wherein the catalyst island  
      comprises particles of ceramic material.
- 25       15. The apparatus of claim 10 further comprising a conductive  
          line in electrical contact with each island.
16. The apparatus of claim 10 wherein the catalyst islands are  
      separated by a distance less than about 50 microns.
- 30       17. The apparatus of claim 10, wherein the substrate comprises  
          a material selected from the group consisting of silicon,  
          alumina, quartz, silica and silicon nitride.
- 35       18. The apparatus of claim 10 wherein the catalyst islands  
          comprise a material selected from the group consisting of  
          iron, molybdenum, cobalt, nickel, ruthenium, zinc and  
          oxides thereof.
- 40       19. The apparatus of claim 10 further comprising a metal cover  
          which covers an end portion of the nanotube and a portion  
          of at least one island.

20. An apparatus comprising:



5

- a) a substrate with a top surface;
- b) a catalyst island disposed on the top surface of the substrate;
- c) a metal pad disposed on the top surface of the substrate;
- 10 d) a carbon nanotube extending between the catalyst island and the metal pad such that the nanotube provides an electrical connection between the catalyst island and metal pad.

15

21. The apparatus of claim 20 wherein the nanotube is disposed on the top surface of the substrate.

22. The apparatus of claim 20 wherein the nanotube is supported only by its ends.

20

23. The apparatus of claim 20 wherein the substrate comprises a trench under the nanotube so that the nanotube is freestanding.

25

24. The apparatus of claim 20 wherein the catalyst island comprises particles of ceramic material.

25. The apparatus of claim 20 further comprising a conductive line in electrical contact with the island.

30

26. The apparatus of claim 20 further comprising a conductive line in electrical contact with the metal pad.

35

27. The apparatus of claim 20, wherein the substrate comprises a material selected from the group consisting of silicon, alumina, quartz, silica and silicon nitride.

40

28. The apparatus of claim 1 wherein the catalyst island comprises a material selected from the group consisting of iron, molybdenum, cobalt, nickel, ruthenium, zinc and oxides thereof.

29. The apparatus of claim 1 further comprising a metal cover which covers an end portion of the nanotube and a portion of the island.

5

30. An apparatus for atomic force microscopy comprising:

- a) a base;
- a) a cantilever extending from the base, the cantilever having  
10 a free end opposite the base;
- b) a catalyst particle disposed on the free end of the  
cantilever, wherein the catalyst particle is capable of  
catalyzing the growth of carbon nanotubes;
- c) a carbon nanotube extending from the catalyst particle.

15

31. The apparatus of claim 30 wherein the catalyst particle  
comprises  $\text{Fe}_2\text{O}_3$ .

20

32. The apparatus of claim 30 wherein the catalyst particle  
comprises a material selected from the group consisting of  
iron, molybdenum, cobalt, nickel, ruthenium, zinc and  
oxides thereof.

25

33. The apparatus of claim 30 further comprising a tip on the  
free end, wherein the catalyst particle is disposed on the  
tip.

30

34. A method for producing an atomic force microscopy apparatus  
with a tip comprising a carbon nanotube, the method comprising  
the steps of:

- a) providing a cantilever suitable for use in atomic force  
microscopy;
- b) disposing a catalyst particle on a free end of the  
35 cantilever, wherein the catalyst particle is capable of  
growing carbon nanotubes when exposed to a carbon-  
containing gas at elevated temperature;
- c) contacting a carbon-containing gas to the catalyst particle  
at elevated temperature.

40

41. The method of claim 34 wherein step (b) comprises the  
steps of:

- i) contacting the free end to a particle of  $\text{Fe}(\text{NO}_3)_3$   
disposed on an electrically conductive substrate; and

5           ii) applying an electric field between the free end and  
the substrate.

42. The method of claim 34 wherein step (b) comprises the  
steps of:

10           i) contacting the free end to a particle of  $\text{Fe}(\text{SO}_4)_2$   
disposed on an electrically conductive substrate; and  
ii) applying an electric field between the free end and  
the substrate.

15 43. A method for producing individually distinct carbon nanotubes,  
the method comprising the steps of:

a) providing a substrate with a top surface;  
b) forming an island of catalyst material on the top surface;  
20 c) heating the substrate and catalyst island; and  
d) contacting the catalyst island with a carbon-containing gas  
for a period of time sufficient to form the nanotubes.

25 44. the method of claim 43 wherein the catalyst island is about  
1-5 microns in size.

45. The method of claim 43, wherein the carbon-containing gas  
comprises methane.

30 46. The method of claim 43, wherein the period of time is about  
10 minutes.

35 47. The apparatus of claim 1 wherein the catalyst island  
comprises a material selected from the group consisting of  
iron, molybdenum, ruthenium and oxides thereof.

48. The apparatus of claim 10 wherein the catalyst islands  
comprise a material selected from the group consisting of  
iron, molybdenum, ruthenium and oxides thereof.

40 49. The apparatus of claim 20 wherein the catalyst island  
comprises a material selected from the group consisting of  
iron, molybdenum, ruthenium and oxides thereof.

1/6

Fig. 1

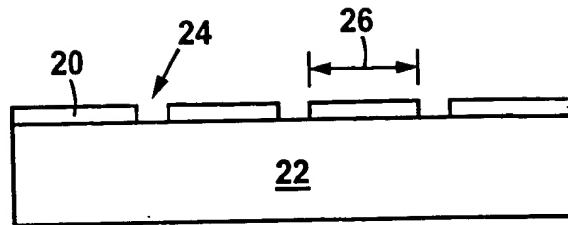


Fig. 2

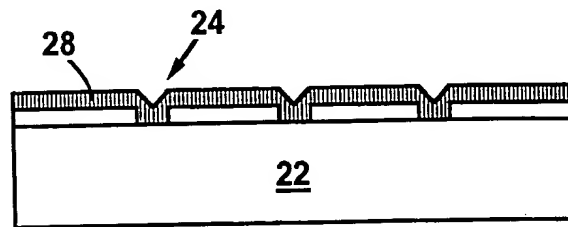


Fig. 3


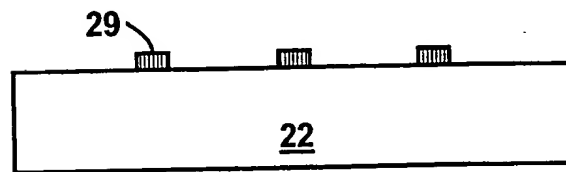


Fig. 4

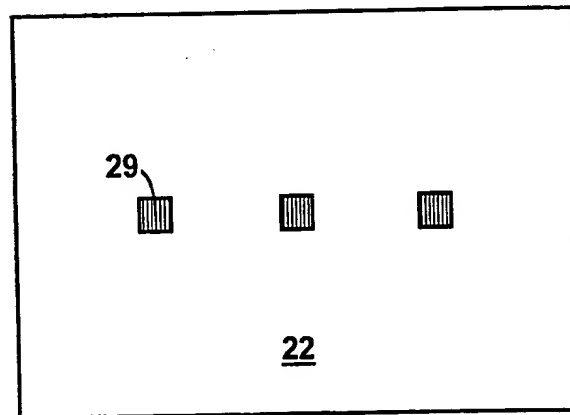

2/6

Fig. 5


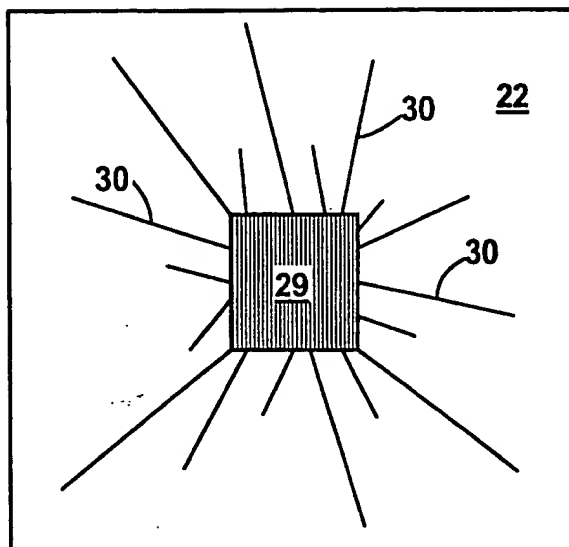


Fig. 6

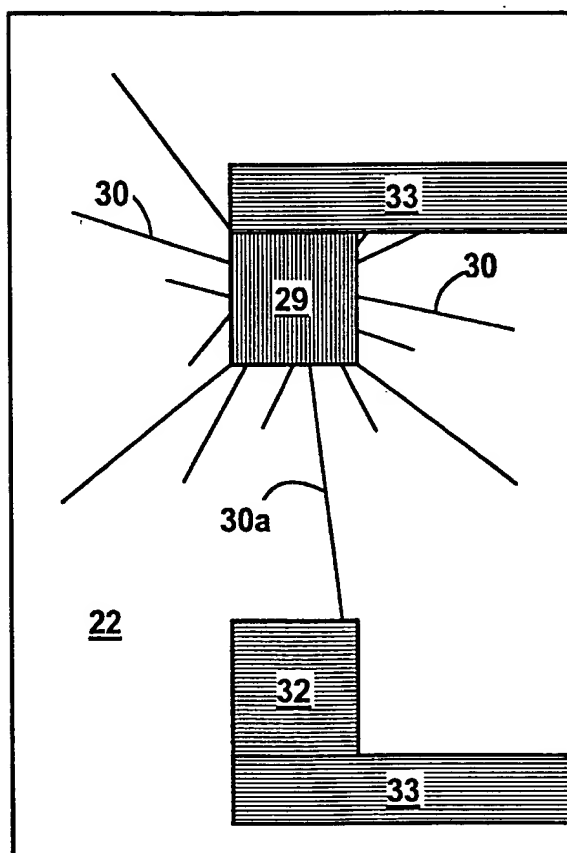

3/6

Fig. 7

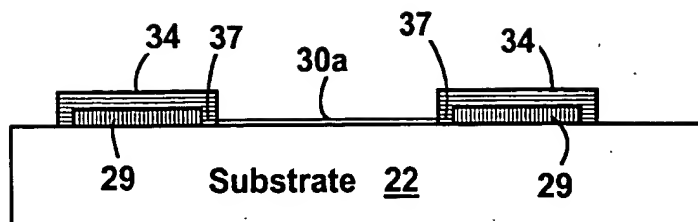


Fig. 8A

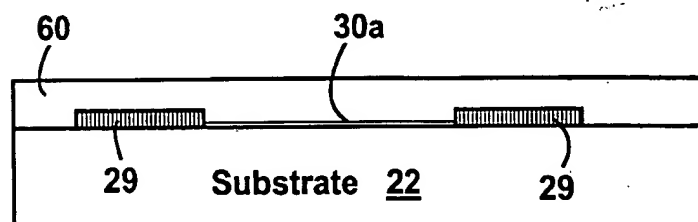


Fig. 8B


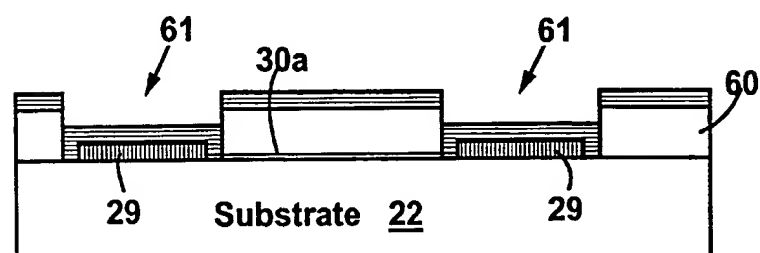


Fig. 8C

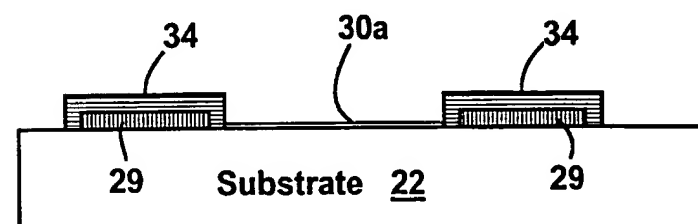

4/6


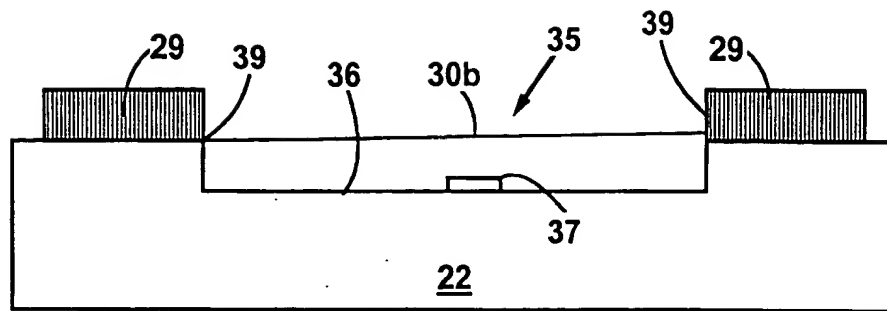


Fig. 9

Fig. 10

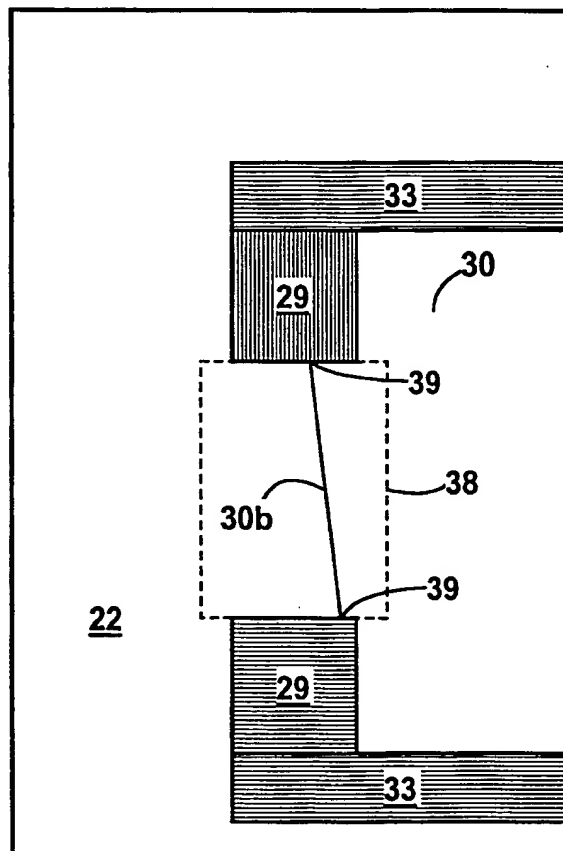

5/6

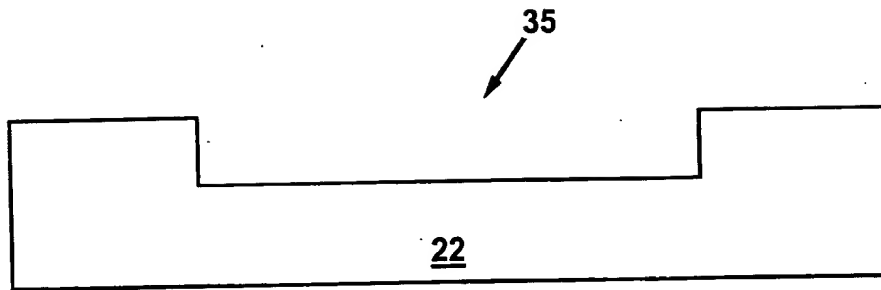


Fig. 11A

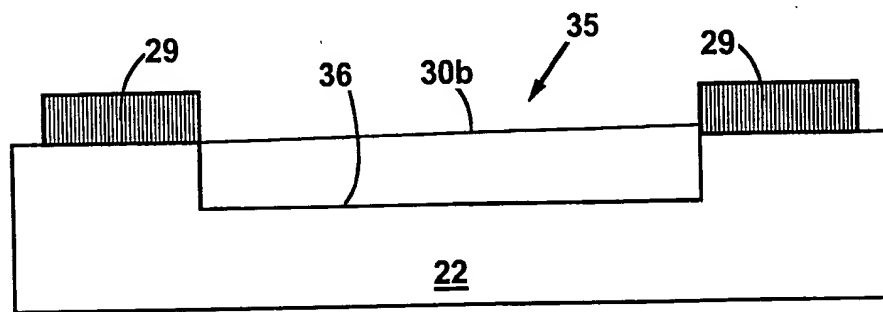


Fig. 11B

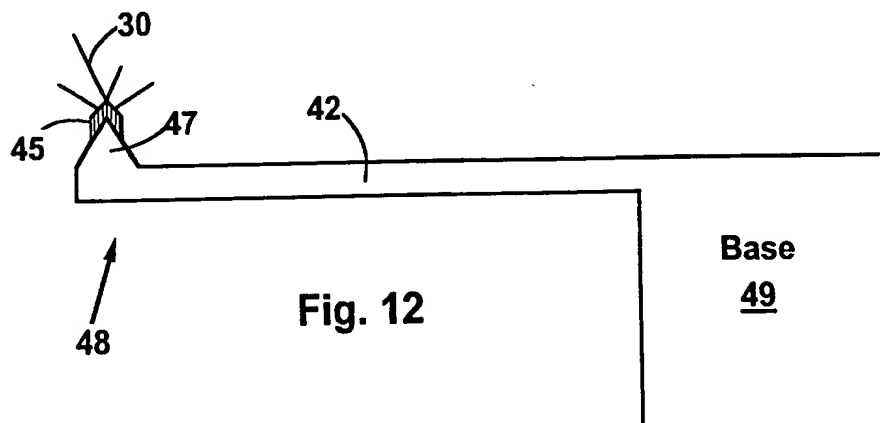


Fig. 12



6/6

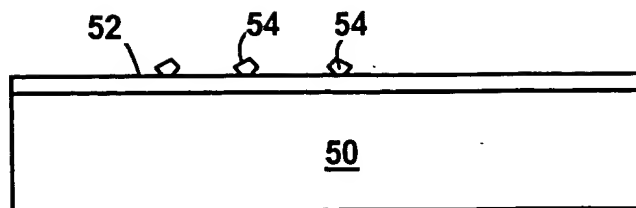


Fig. 13A

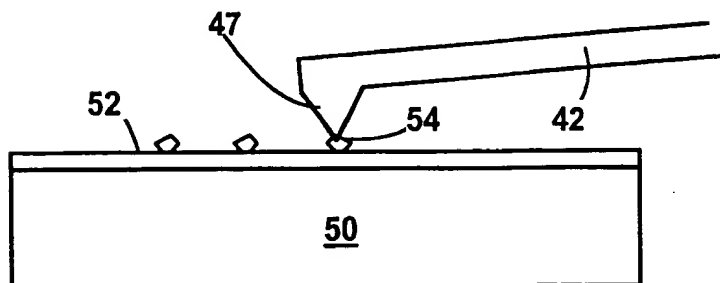


Fig. 13B

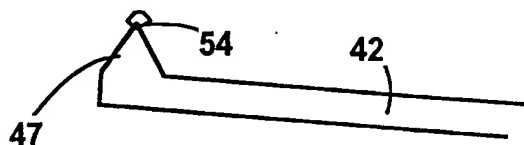


Fig. 13C

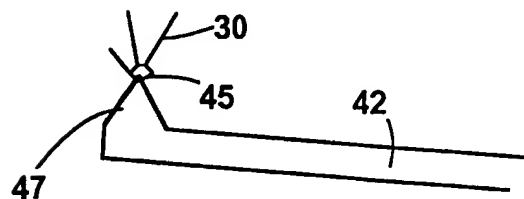


Fig. 13D

## INTERNATIONAL SEARCH REPORT

 International application No.  
PCT/US99/15222

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : CO1B 31/00; GO1B 7/34

US CL : 423/453, 458, 447.2, 447.3; 250/307, 310

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 423/453, 458, 447.2, 447.3; 250/307, 310

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, WEST

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,780,101 A (NOLAN et al.) 14 July 1998, see entire document.	1-49
Y	WO 95/10481 (FAGAN) 20 April 1995, see entire document.	1-49
Y	WO 98/05920 (COLBERT et al.) 12 February 1998, see entire document.	1-49
Y	DAI, HONGJIE et al., "Nanotubes as nanoprobe in scanning probe microscopy", Nature, Vol. 384, 14 November 1996, pp 147-149.	41-42

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A*	document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means		
*P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

30 SEPTEMBER 1999

Date of mailing of the international search report

21 OCT 1999

 Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

KISHOR MATEKAR

Telephone No. (703) 308-0661